LM2596 Buck Converter Module

FEATURES

- LM2596 DC-DC Buck Converter Step Down Module
- Input Voltage Range: 13.5V to 30V
- Output Voltage: 3.3V, 5.0V, 12V, ADJ(2V to 28V)
- Output Current: Rated current 2A, maximum 3A. (Heat sink required.)
- Switching Frequency: 150kHz
- Power Indicator LED

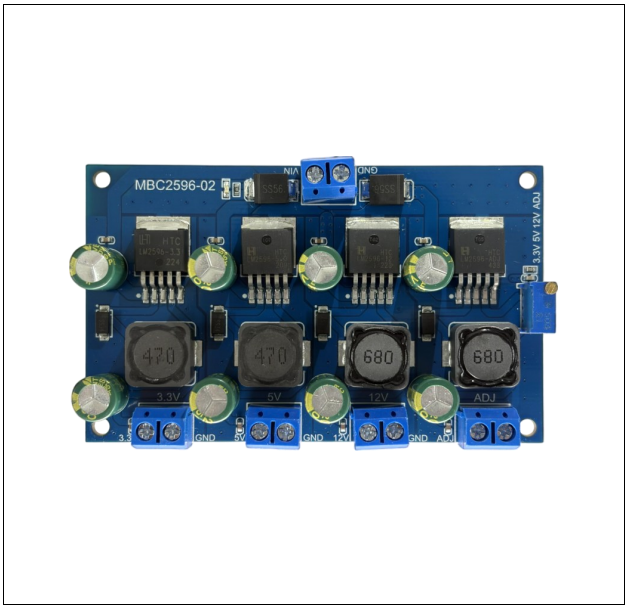

APPLICATIONS

- Simple high efficiency step-down regulator
- On-card switching regulator
- Efficient Pre-Regulator for Linear Regulators

DESCRIPTION

The LM2596 Buck Converter Module is a non-isolated step-down DC-DC converter with non-synchronous rectification.

ORDERING INFORMATION

Part Number	MBC2596-02
Device	LM2596 Buck Converter Module
Package	Assembled Module (55mm X 90mm)

APPLICATION GUIDE

The power dissipation of the LM2596 Buck Converter Module is internally limited. Small sized PCB and thermal resistance of IC package have limited the power dissipation of the module.

Depending on the conversion condition, 3A full loading is not might possible due to the internally limited power dissipation.

LM2596 Buck Converter Module

SCHEMATICS

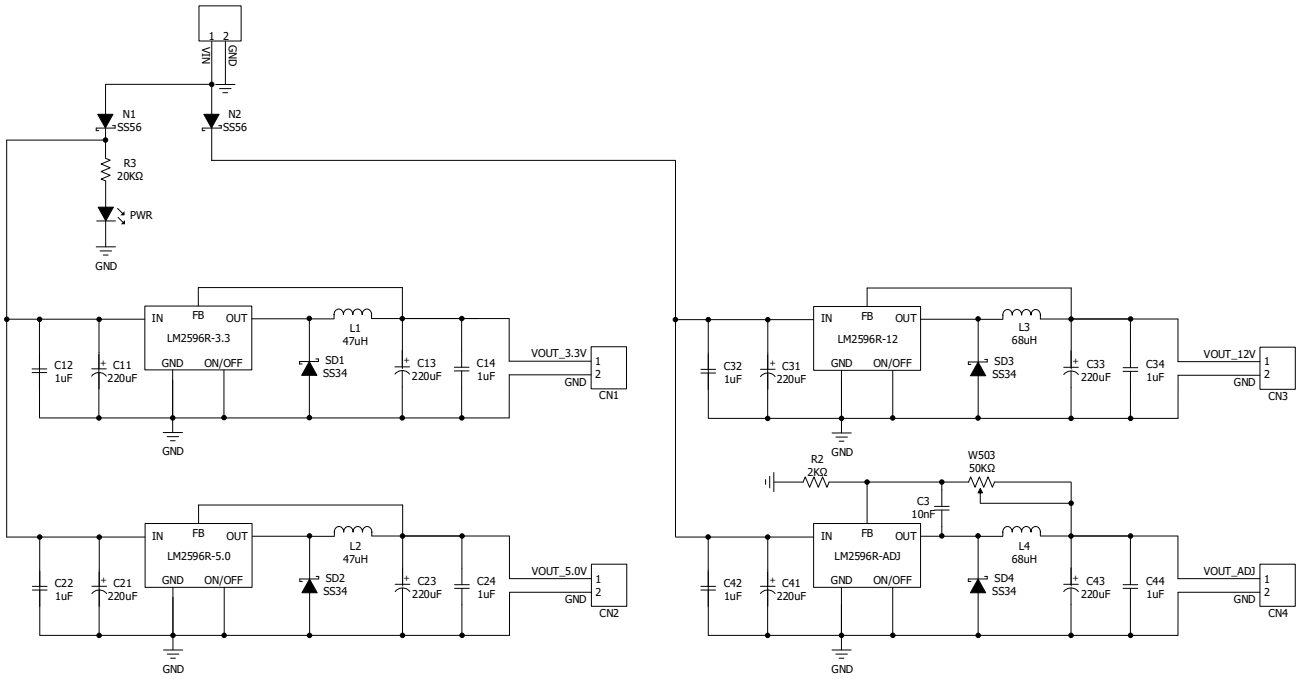

LAYOUT

Top

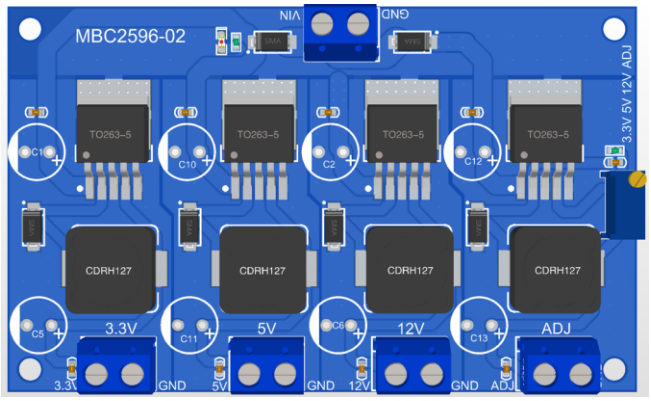

Bottom

LM2596 Buck Converter Module

SIZE INFORMATION

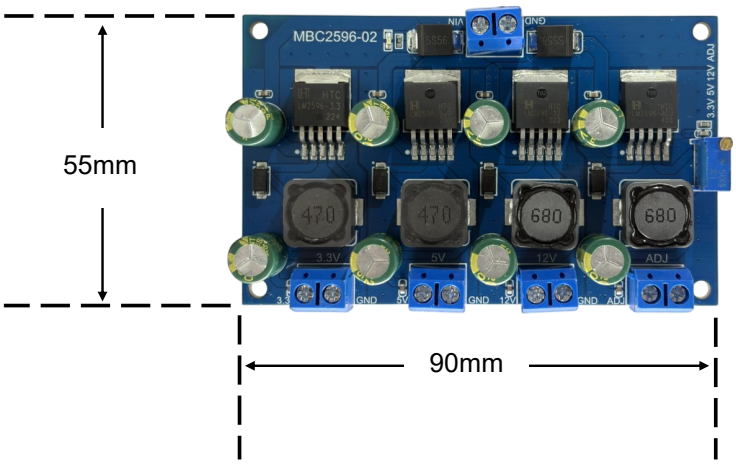

PRODUCT IMAGE

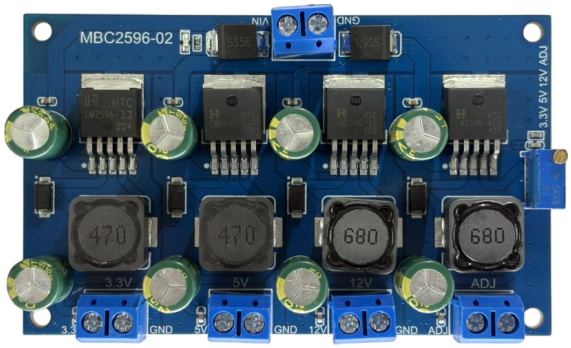

LM2596 Buck Converter Module

I/O PORT CONFIGURATION AND DESCRIPTION

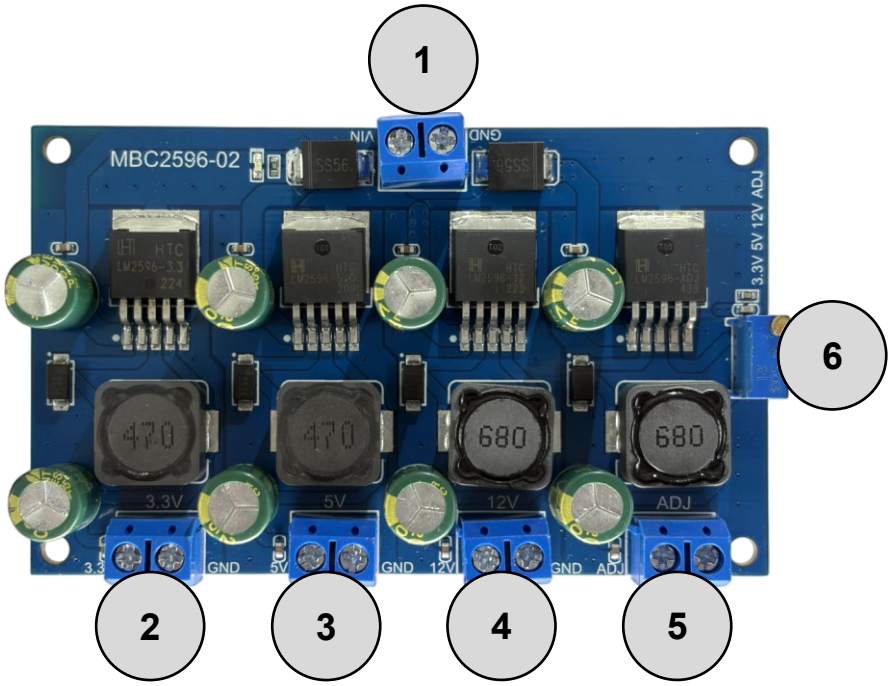

Designator	Port Name	Port Description
1	Input Connector	Input DC 13.5V to 30V
2	Output Connector	Output 3.3V
3	Output Connector	Output 5.0V
4	Output Connector	Output 12V
5	Output Connector	Output Adjustable
6	Adjustable Output Control	Adjustable DC 2V to 28V

REVISION NOTICE

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.

3.0A, 150kHz, Step-Down Switching Regulator LM2596

FEATURES

- 3.3V, 5.0V, 12V, and Adjustable Output version
- Adjustable Output Voltage range, 1.2V to 37V
  ±4% Max. Over Line and Load conditions
- Guaranteed Output Current of 3A
- Available in TO-263, TO-220, SOP-8PP Packages
- Requires Only 4 External Components
- Excellent Line and Load Regulation Specifications
- 150kHz Fixed Frequency Internal Oscillator
- TTL Shutdown Capability
- Low Power Standby Mode, IQ typically 100mA
- Thermal Shutdown and Current Limit Protection
- Moisture Sensitivity Level 3

SOP-8PP



TO-263-5



TO-220-5

TO-220TV-5

APPLICATION

- Simple High-Efficiency Step-Down(Buck) Regulator
- Efficient Pre-Regulator for Linear Regulators
- On-Card Switching Regulators
- Positive to Negative Converter(Buck-Boost)
- Negative Step-Up Converters
- Power Supply for Battery Chargers

ORDERING INFORMATION

Device	Package
LM2596R-X.X	TO-263-5L
LM2596T-X.X	TO-220-5L
LM2596TV-X.X	TO-220TV-5L
LM2596DP-X.X	SOP-8PP

X.X = Output Voltage = 3.3, 5.0, 12, ADJ

DESCRIPTION

The LM2596 series of regulators are monolithic integrated circuits ideally suited for easy and convenient design of a step-down switching regulator (buck converter). All circuits of this series are capable of driving a 3.0A load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3V, 5.0V,12V, and an adjustable output version. These regulators were designed to minimize the number of external components to simplify the power supply design. Standard series of inductors optimized for use with the LM2596 are offered by several different inductor manufacturers. Since the LM2596 converter is a switch-mode power supply, its efficiency is significantly higher in comparison with popular three-terminal linear regulators, especially with higher input voltages. In many cases, the power dissipated is so low that no heatsink is required or its size could be reduced dramatically. A standard series of inductors optimized for use with the LM2596 are available from several different manufacturers. This feature greatly simplifies the design of switch-mode power supplies. The LM2596 features include a guaranteed +/- 4% tolerance on output voltage within specified input voltages and output load conditions, and +/-15% on the oscillator frequency (+/- 2% over 0℃ to 125℃). External shutdown is included, featuring 80μA (typical) standby current. Self-protection features include a two stage frequency reducing current limit for output switch and an over temperature shutdown for complete protection under fault conditions.

Ordering Information

V_{OUT}	Package	Order No.	Description	Package Marking	Status
ADJ	SOP-8PP	LM2596DP-ADJ	3A, Adjustable, 150kHz, On/off	LM2596-ADJ	Active
	TO-220-5L	LM2596T-ADJ	3A, Adjustable, 150kHz, On/off	LM2596-ADJ	Active
	TO-220TV-5L	LM2596TV-ADJ	3A, Adjustable, 150kHz, On/off	LM2596-ADJ	Active
	TO-263-5L	LM2596R-ADJ	3A, Adjustable, 150kHz, On/off	LM2596-ADJ	Active
3.3V	SOP-8PP	LM2596DP-3.3	3A, Fixed, 150kHz, On/off	LM2596-3.3	Active
	TO-220-5L	LM2596T-3.3	3A, Fixed, 150kHz, On/off	LM2596-3.3	Active
	TO-263-5L	LM2596R-3.3	3A, Fixed, 150kHz, On/off	LM2596-3.3	Active
5.0V	SOP-8PP	LM2596DP-5.0	3A, Fixed, 150kHz, On/off	LM2596-5.0	Active
	TO-220-5L	LM2596T-5.0	3A, Fixed, 150kHz, On/off	LM2596-5.0	Active
	TO-220TV-5L	LM2596TV-5.0	3A, Fixed, 150kHz, On/off	LM2596-5.0	Active
	TO-263-5L	LM2596R-5.0	3A, Fixed, 150kHz, On/off	LM2596-5.0	Active
12V	SOP-8PP	LM2596DP-12	3A, Fixed, 150kHz, On/off	LM2596-12	Contact Us
	TO-220-5L	LM2596T-12	3A, Fixed, 150kHz, On/off	LM2596-12	Active
	TO-220TV-5L	LM2596TV-12	3A, Fixed, 150kHz, On/off	LM2596-12	Active
	TO-263-5L	LM2596R-12	3A, Fixed, 150kHz, On/off	LM2596-12	Active

PIN CONFIGURATION



SOP-8PP

TO-220-5L / TO-220TV-5L

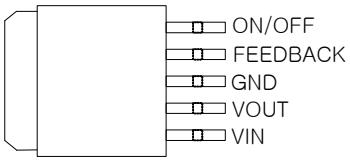

TO-263-5L

PIN DESCRIPTION

Package		Symbol	Description
TO-220-5 TO-220TV-5 TO-263-5	SOP-8PP		
1	1	VIN	This pin is the positive input supply for the LM2596 step–down switching regulator. In order to minimize voltage transients and to supply the switching currents needed by the regulator, a suitable input bypass capacitor must be present.
2	2	VOUT	This is the emitter of the internal switch. The saturation voltage Vsat of this output switch is typically 1.5 V. It should be kept in mind that the PCB area connected to this pin should be kept to a minimum in order to minimize coupling to sensitive circuitry.
3	3	GND	Circuit ground pin.
4	4	FEEDBACK	This pin senses regulated output voltage to complete the feedback loop. The signal is divided by the internal resistor divider network R2, R1 and applied to the non–inverting input of the internal error amplifier. In the Adjustable version of the LM2596 switching regulator this pin is the direct input of the error amplifier and the resistor network R2, R1 is connected externally to allow programming of the output voltage.
5	5	ON/OFF	It allows the switching regulator circuit to be shut down using logic level signals, thus dropping the total input supply current to approximately 80uA. The threshold voltage is typically 1.3V. Applying a voltage above this value (up to +Vin) shuts the regulator off. If the voltage applied to this pin is lower than 1.3V or if this pin is left open, the regulator will be in the "on" condition.
-	6, 7, 8	N.C.	No Connect.

* Exposed Pad of SOP8-PP package should be externally connected to GND.

Typical Application (Fixed Output Voltage Versions)

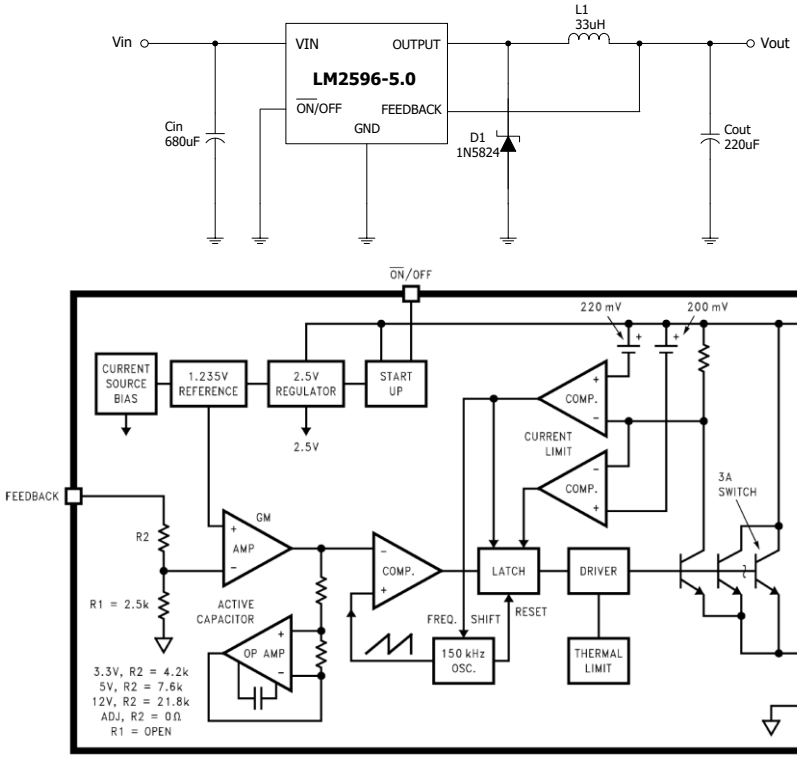

Absolute Maximum Ratings

Rating	Symbol	Value	UNIT
Maximum Supply Voltage	Vin	45	V
On/Off Pin Input Voltage	-	-0.3V ≤ V ≤ +Vin	V
Output Voltage to Ground (Steady-State)	-	-1.0	V
Power Dissipation			
SOP8-PP-8Lead	P_D	Internally Limited	W
Thermal Resistance, Junction to Ambient	θ_{JA}	Contact us	℃/W
Thermal Resistance, Junction to Case	θ_{JC}	Contact us	℃/W
TO-220-5Lead	P_D	Internally Limited	W
Thermal Resistance, Junction to Ambient	θ_{JA}	65	℃/W
Thermal Resistance, Junction to Case	θ_{JC}	5	℃/W
TO-263-5Lead	P_D	Internally Limited	W
Thermal Resistance, Junction to Ambient	θ_{JA}	70	℃/W
Thermal Resistance, Junction to Case	θ_{JC}	5	℃/W
Storage Temperature Range	T_{STG}	-60 to +150	℃
Minimum ESD Rating (Human Body Model)	-	2	kV
Lead Temperature (Soldering, 10seconds)	-	260	℃
Maximum Junction Temperature	T_J	150	℃

OPERATING RATINGS (Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications, see the Electrical Characteristics.)

Rating	Symbol	Value.	Unit
Operating Junction Temperature Range	T_J	-40 to +125	℃
Supply Voltage	Vin	40	V

ELECTRICAL CHARACTERISTICS / SYSTEM PARAMETERS ([Note 1] Test Circuit Figure 2)

(Unless otherwise specified, Vin = 12V for the 3.3V, 5.0V, and Adjustable version, Vin = 25V for the 12V version. I_{LOAD} = 500 mA. For typical values T_J = 25°C, for min/max values T_J is the operating junction temperature range that applies [Note 2], unless otherwise noted.)

Characteristics	Symbol	Min	TYP	Max	Unit
LM2596-3.3V ([Note 1] Test Circuit Figure 2)					
Output Voltage (Vin=12V, I_{LOAD}=0.5A, T_J=25℃)	Vout	3.234	3.3	3.366	V
Output Voltage (6.0V≤Vin≤40V, 0.5A≤I_{LOAD}≤3.0A	Vout				
T_J=25℃		3.168	3.3	3.432	V
T_J=-40℃ ~ +125℃		3.135	-	3.465	
Efficiency (Vin=12V, I_{LOAD}=3.0A)	η	-	73	-	%
LM2596-5.0V ([Note 1] Test Circuit Figure 2)					
Output Voltage (Vin=12V, I_{LOAD}=0.5A, T_J=25℃)	Vout	4.9	5.0	5.1	V
Output Voltage (8.0V≤Vin≤40V, 0.5A≤I_{LOAD}≤3.0A	Vout				
T_J=25℃		4.8	5.0	5.2	V
T_J=-40℃ ~ +125℃		4.75	-	5.25	
Efficiency (Vin=12V, I_{LOAD}=3.0A)	η	-	80	-	%
LM2596-12V ([Note 1] Test Circuit Figure 2)					
Output Voltage (Vin=25V, I_{LOAD}=0.5A, T_J=25℃)	Vout	11.76	12	12.24	V
Output Voltage (15V≤Vin≤40V, 0.5A≤I_{LOAD}≤3.0A	Vout				
T_J=25℃		11.52	12	12.48	V
T_J= -40℃ ~ +125℃		11.4	-	12.6	
Efficiency (Vin=12V, I_{LOAD}=3.0A)	η	-	90	-	%
LM2596-ADJ ([Note 1] Test Circuit Figure 2)					
Feedback Voltage (Vin=12V, I_{LOAD}=0.5A, T_J=25℃)	Vout	1.217	1.23	1.243	V
Feedback Voltage(8.0V≤Vin≤40V, 0.5A≤I_{LOAD}≤3.0A, Vout=5.0V)	Vout				
T_J=25℃		1.193	1.23	1.267	V
T_J= -40℃ ~ +125℃		1.18	-	1.28	
Efficiency (Vin=12V, I_{LOAD}=3.0A, Vout=5.0V)	η	-	73	-	%

Characteristics	Symbol	Min	TYP	Max	Unit
All Output Voltage Versions					
Feedback Bias Current (Vout=5.0V [Adjustable Version Only])	Ib				
T_J=25℃		11.52	12	12.48	nA
T_J= 0 ~ +125℃		11.4	-	12.6	
Oscillator Frequency	Fosc				
T_J=25℃		127	150	173	kHz
T_J= 0 ~ +125℃		110	-	173	
Saturation Voltage (Iout=3.0A [note 3])	Vsat				
T_J=25℃		-	1.16	1.4	V
T_J= 0 ~ +125℃		-	-	1.5	
Max Duty Cycle ("0") [Note 4]	DC	-	100	-	%
Current Limit (Peak Current [Note 3])	ICL				
T_J=25℃		3.6	4.5	6.9	A
T_J= 0 ~ +125℃		3.4	-	7.5	
Output Leakage Current [Note 5 and 6], T_J=25℃	IL				
Output = 0V		-	-	25	μA
Output = -1.0V		-	2	10	mA
Quiescent Current [Note 5]	IQ				
T_J=25℃		-	5	-	mA
T_J= 0 ~ +125℃		-	-	10	
Standby Quiescent Current (ON/OFF Pin = 5.0V ("off"))	ISTBY				
T_J=25℃		-	80	200	μA
T_J= 0 ~ +125℃		-	-	250	
ON/OFF Pin Logic Input Level (Test circuit Figure 2)					
Vout=0V	VIH				
T_J=25℃		2.0	1.3	-	
T_J= 0 ~ +125℃		2.0	-	-	V
Vout=Nominal Output Voltage	VIL				
T_J=25℃		-	1.3	0.6	
T_J= 0 ~ +125℃		-	-	0.6	
ON/OFF Pin Input Current (Test Circuit Figure 2)					
VLOGIC = 2.5V (Regulator OFF)	IIH	-	5	15	μA
VLOGIC = 0.5V (Regulator ON)	IIL	-	0.02	5.0	

1. External components such as the catch diode, inductor, input and output capacitors can affect switching regulator system performance. When the LM2596 is used as shown in the Figure 1 test circuit, system performance will be as shown in system parameters section .
2. Tested junction temperature range for the LM2596 : TLOW = –40°C THIGH = +125°C
3. Output (Pin 2) sourcing current. No diode, inductor or capacitor connected to output pin.
4. Feedback (Pin 4) removed from output and connected to 0 V.
5. Feedback (Pin 4) removed from output and connected to +12V for the Adjustable, 3.3V, and 5.0V versions, and '+25 V for the 12V versions, to force the output transistor “off”.C195
6. Vin = 40 V.

TYPICAL PERFORMANCE CHARACTERISTICS (Circuit of Figure 2)

Normalized Output Voltage

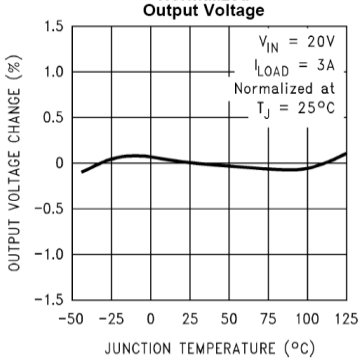

Line Regulation

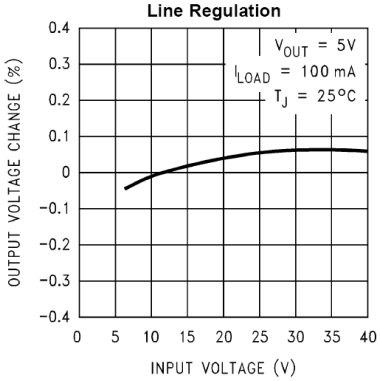

Efficiency

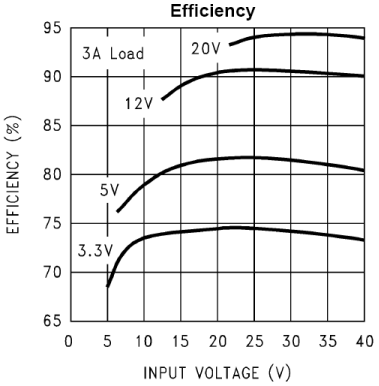

Switch Saturation Voltage

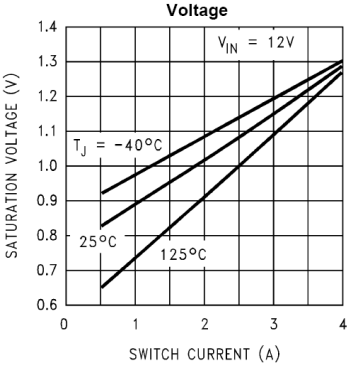

Switch Current Limit

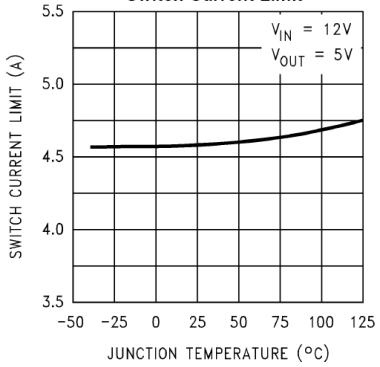

Dropout Voltage

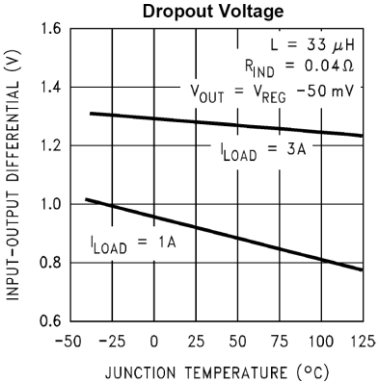

Operating Quiescent Current

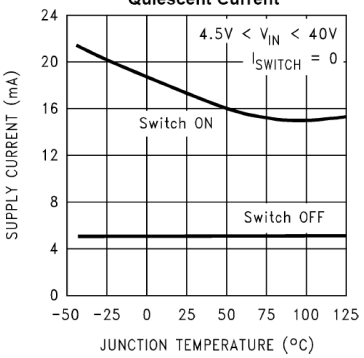

Shutdown Quiescent Current

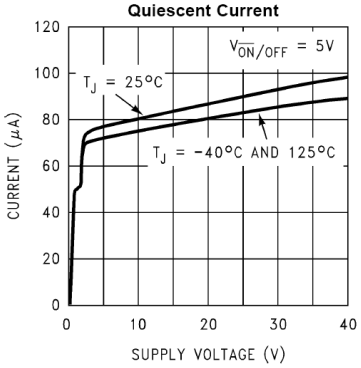

Minimum Operating Supply Voltage

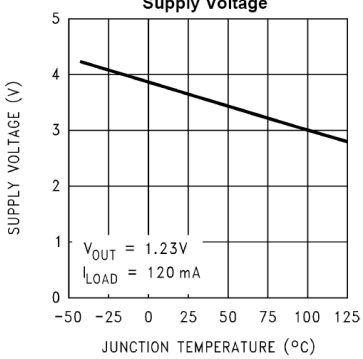

$\overline{ON}$ /OFF Threshold Voltage

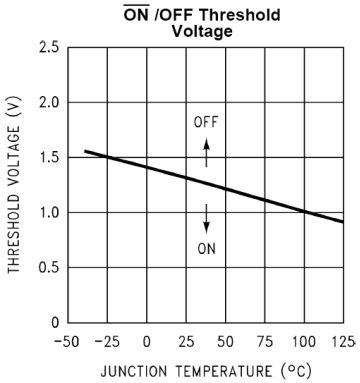

$\overline{ON}$ /OFF Pin Current (Sinking)

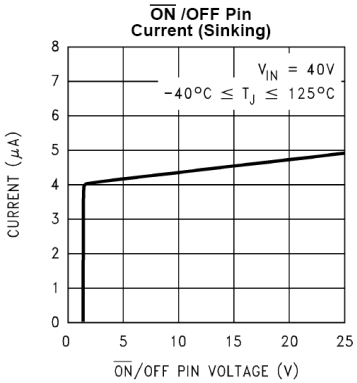

Switching Frequency

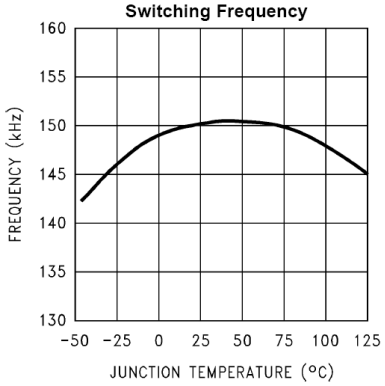

TYPICAL PERFORMANCE CHARACTERISTICS (Circuit of Figure 2)

Feedback Pin
Bias Current

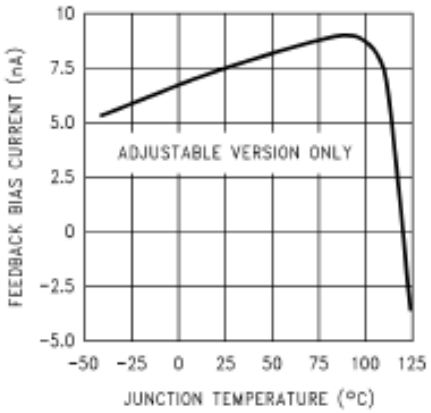

Continuous Mode Switching Waveforms
V_{IN} = 20V, V_{OUT} = 5V, I_{LOAD} = 2A
L = 32 µH, C_{OUT} = 220 µF, C_{OUT} ESR = 50 mΩ

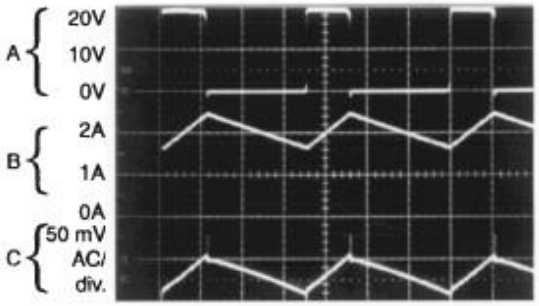

01258317

Horizontal Time Base: 2 µs/div.

A: Output Pin Voltage, 10V/div.
B: Inductor Current 1A/div.
C: Output Ripple Voltage, 50 mV/div.

Discontinuous Mode Switching Waveforms
V_{IN} = 20V, V_{OUT} = 5V, I_{LOAD} = 500 mA
L = 10 µH, C_{OUT} = 330 µF, C_{OUT} ESR = 45 mΩ

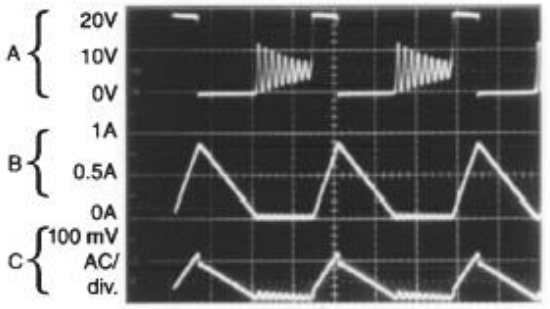

01258318

Horizontal Time Base: 2 µs/div.

A: Output Pin Voltage, 10V/div.
B: Inductor Current 0.5A/div.
C: Output Ripple Voltage, 100 mV/div.

Load Transient Response for Continuous Mode
V_{IN} = 20V, V_{OUT} = 5V, I_{LOAD} = 500 mA to 2A
L = 32 µH, C_{OUT} = 220 µF, C_{OUT} ESR = 50 mΩ

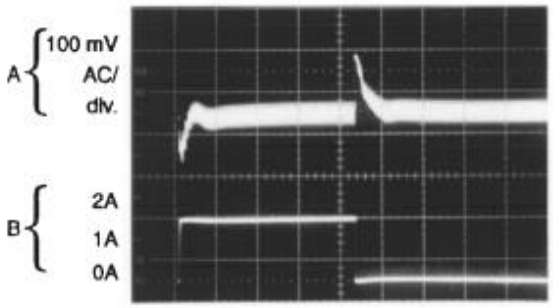

01258319

Horizontal Time Base: 100 µs/div.

A: Output Voltage, 100 mV/div. (AC)
B: 500 mA to 2A Load Pulse

Load Transient Response for Discontinuous Mode
V_{IN} = 20V, V_{OUT} = 5V, I_{LOAD} = 500 mA to 2A
L = 10 µH, C_{OUT} = 330 µF, C_{OUT} ESR = 45 mΩ

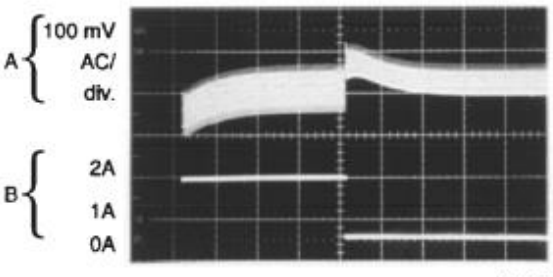

01258320

Horizontal Time Base: 200 µs/div.

A: Output Voltage, 100 mV/div. (AC)
B: 500 mA to 2A Load Pulse

Test Circuit and Layout Guidelines

Fixed Output Voltage Versions

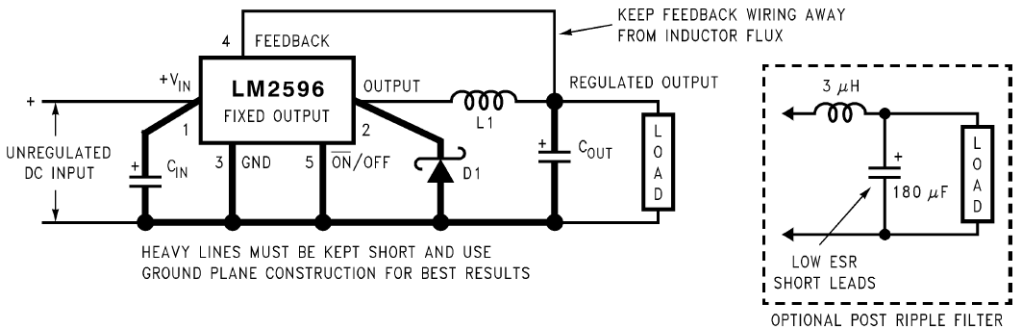

C_{IN} = 470μF, 50V, C_{OUT} = 220μF, 25V (Aluminum Electrolytic Nichicon "PL Series"

D1 = 5A, 40V Schottky Rectifier, IN5825

L1 = 68uH, L38

Adjustable Output Voltage Versions

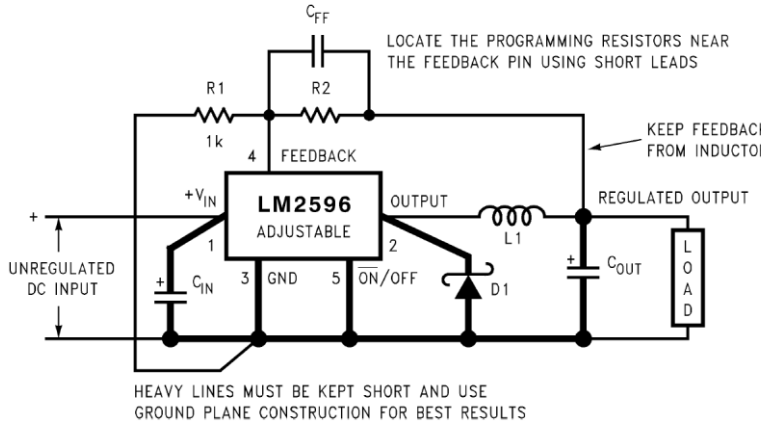

$$V_{OUT} = V_{REF}\left(1 + \frac{R_2}{R_1}\right)$$

where V_{REF} = 1.23V

Cin = 470 μF, 50V, Cout = 220 μF, 35V (Aluminum Electrolytic Nichicon "PL Series"

D1 = 5A, 40V Schottky Rectifier, IN5825

L1 = 68uH, R1 = 1 kΩ, 1%, R2 = R1 x (Vout / Vref - 1)

As in any switching regulator, layout is very important. Rapidly switching currents associated with wiring inductance can generate voltage transients which can cause problems. For minimal inductance and ground loops, the wires indicated by heavy lines should be wide printed circuit traces and should be kept as short as possible. For best results, external components should be located as close to the switching IC as possible using ground plane construction or single point grounding. If open core inductors are used, special care must be taken as to the location and positioning of this type of inductor. Allowing the inductor flux to intersect sensitive feedback, IC ground path and COUT wiring can cause problems. When using the adjustable version, special care must be taken as to the location of the feedback resistors and the associated wiring. Physically locate both resistors near the IC, and route the wiring away from the inductor, especially an open core type of inductor.

REVISION NOTICE

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.