
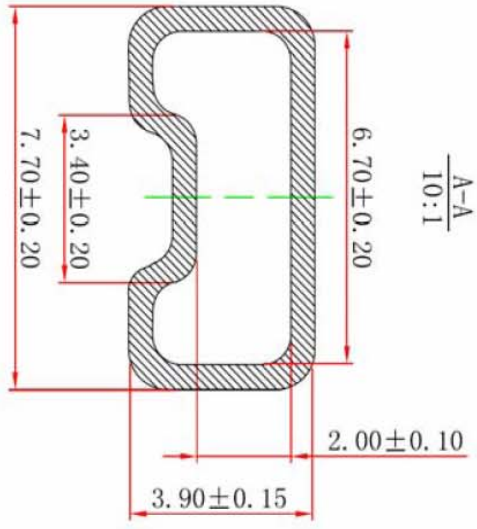


# Taping & Tube Specification

## SOP 16

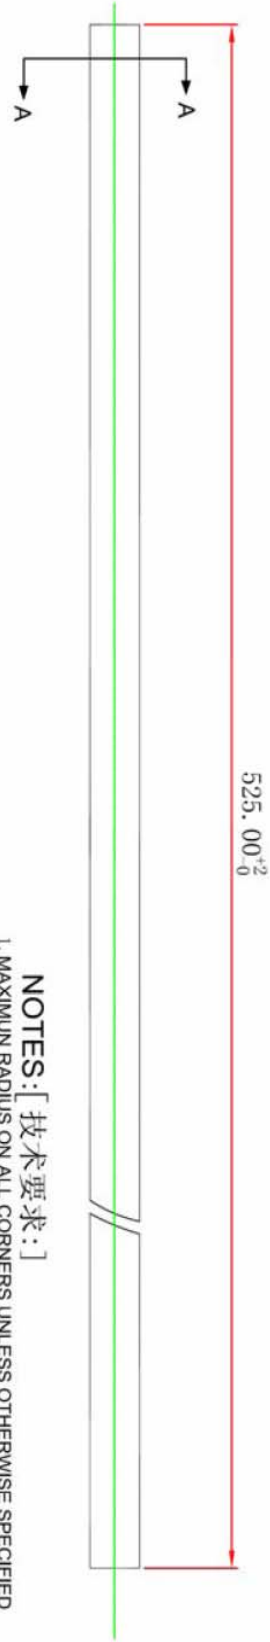

### NOTES: [技术要求:]

1. MAXIMUM RADIUS ON ALL CORNERS UNLESS OTHERWISE SPECIFIED WILL BE R0.5MAX; [未注圆角为内R0.50;]
2. TRANSPARENCY GOOD, WALL THICKNESS EVEN, IS STIFF, GUARDS AGAINST THE STATIC ELECTRICITY; [透明度好, 壁厚均匀, 挺直, 防静电;]
3. WALL THICKNESS 0.50±0.10, NO BURRO ON EDGE; [壁厚为0.50±0.10, 端部边缘无毛刺;]
5. ANTISTATIC COATED 10<sup>5</sup>~10<sup>11</sup> OHMS/SQ. [表面阻抗: 10<sup>5</sup>~10<sup>11</sup>Ω/cm<sup>2</sup>;]
6. THE DESIGN AND THE WRITING ARE RED [图案和文字为红色;]
7. USES IN SOP8/16 (150MIL) TO SEAL THE PRODUCT FOR PACKING, THE PRODUCT FILLS IN THE MATERIAL TUBE WITHOUT THECARD PHENOMENON; [用于SOP8/16(150mil)封装产品的包装, 产品在料管中无卡塞现象;]
8. THE COLOR OF PLUG WITH WHITE, GREY, BLACK, BLUE AND CERULEAN ARE GIVEN BY REMAND; [白, 灰, 黑, 蓝, 天蓝, 兼按需求出货;]
9. WHEN PLUG TRIES TO FILL IN THE TUBE CANNOT TOO TIGHT OR TOO ISLOOSE, OTHERWISE REFUSES TO ACCEPT; [软塞试塞于管中时不能太紧或太松, 否则拒收;]
10. BAN TO USE THE LEVEL 1 ENVIRONMENT-RELATED SUBSTANCES OF JET PRESCRIBING; [禁止使用长电科技规定的一级环境管理物质;]
11. ALL DIMS IN mm. [所有单位为mm;]
12. THE DIRECTION OF VIEW: [视图方向: ]